



**1. 4" Slim cabinet**

Extremely slim box with light weight, easy moving, easy installation

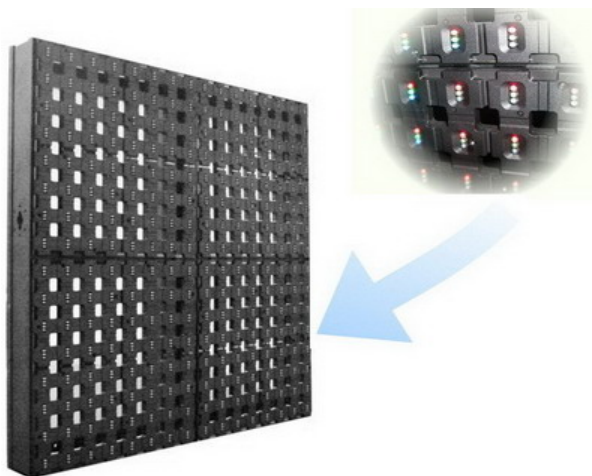

**2. Easy installation by Quick Locker**

With our Quick Locker, EasySlim could be installed within minutes!

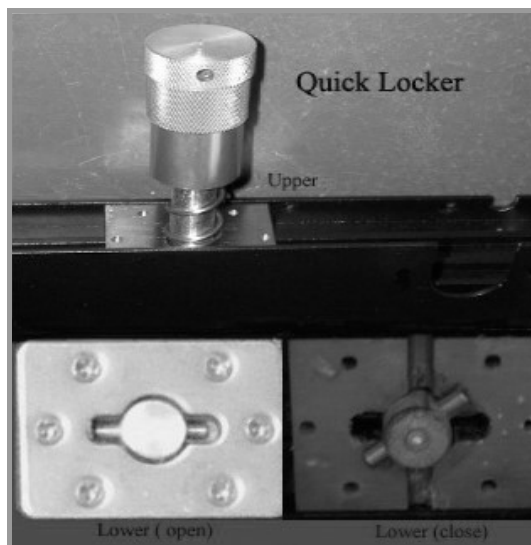

**3. Direct play with multimedia devices**

Multimedia devices such as DVD player, TV, camera, HD, Flash Disk and other USB devices play with **EasySlim** directly, as well, it could be controlled by computer synchronously

**4. Indoor & outdoor dual uses**

Water-proof, anti-dust, anti-UV...

**5. Low Power Consumption**

Saving energy extremely, advocate environment-protection!

**6. Pretty suitable for rental business**

Duo to its advantages of easy moving & installation, slim body & light weight, **EasySlim** is pretty suitable for some short-term activities such as pop music show, discotheque, and public activities indoor & outdoor



Day



Night

**7. Aluminium metal cabinet**

Light weight, Anti-acid, Anti-salt, Anti-alkali

Name	<b>EasySlim</b>		
Model No.	ECS-E16		
Pixel Configuration	1R1G1B		
Pitch:	16mm		
Pixel Density	3906 dots / m <sup>2</sup>		
Cabinet Size	768×512 mm, 48×32 pixels		
Cabinet Weight	12.5 KG		
LED Parameters	Wavelength(nm)	Wavelength(nm)	Brightness(mcd)
	R	615—630	400—800
	G	515—525	1400—2000
	B	465—475	350—550
Power Consumption	< 300W/m <sup>2</sup>		
Viewing Angle	Horizontal 120° , Perpendicularity 60°		
Brightness	6000cd / m <sup>2</sup>		
Viewing Distance	50—200m (Best Viewing Distance)		
Control Method	1. Computer synchronous control (Windows 98/2000/NT/XP) 2. Multimedia devices direct play		
Gray Level	1024 steps each color (Software adjustment)		
Brightness Adjustment	Continuous stepless adjustment (Auto/Manual)		
Display Color	16,800,000 Colors		
Driving Method	Continuous static current		
Frame Frequency	≥60 Frame / Sec		
Refresh Rate	≥1000Hz		
LED Use Life	100,000 Hours		
Data Transmission	1. Computer: Network Cable in 150m; Optical fiber over 150m 2. Multimedia devices direct transmitting		
Communication Interface	S-Video, USB, Network Cable...		
Color Temperature	3000-8500K (Adjustable)		
Power Supply	AC110-230V/50/60Hz (Optional)		
Protection	IP65		
Working Temperature	-20°C—50°C		
Working Humidity	≥90%		

**Notes:**

1. Cabinet size is alterable according to the different sizes of the screen
2. Pitch optional as below:

Pitch(mm)	Model#	Pitch(mm)	Model#
P37	ECS-E37	P16	ECS-E16



ENVIRONMENTAL PROTECTION



ENERGY-SAVING